


STYLE AND LOCATION PLACEMENT GUIDE

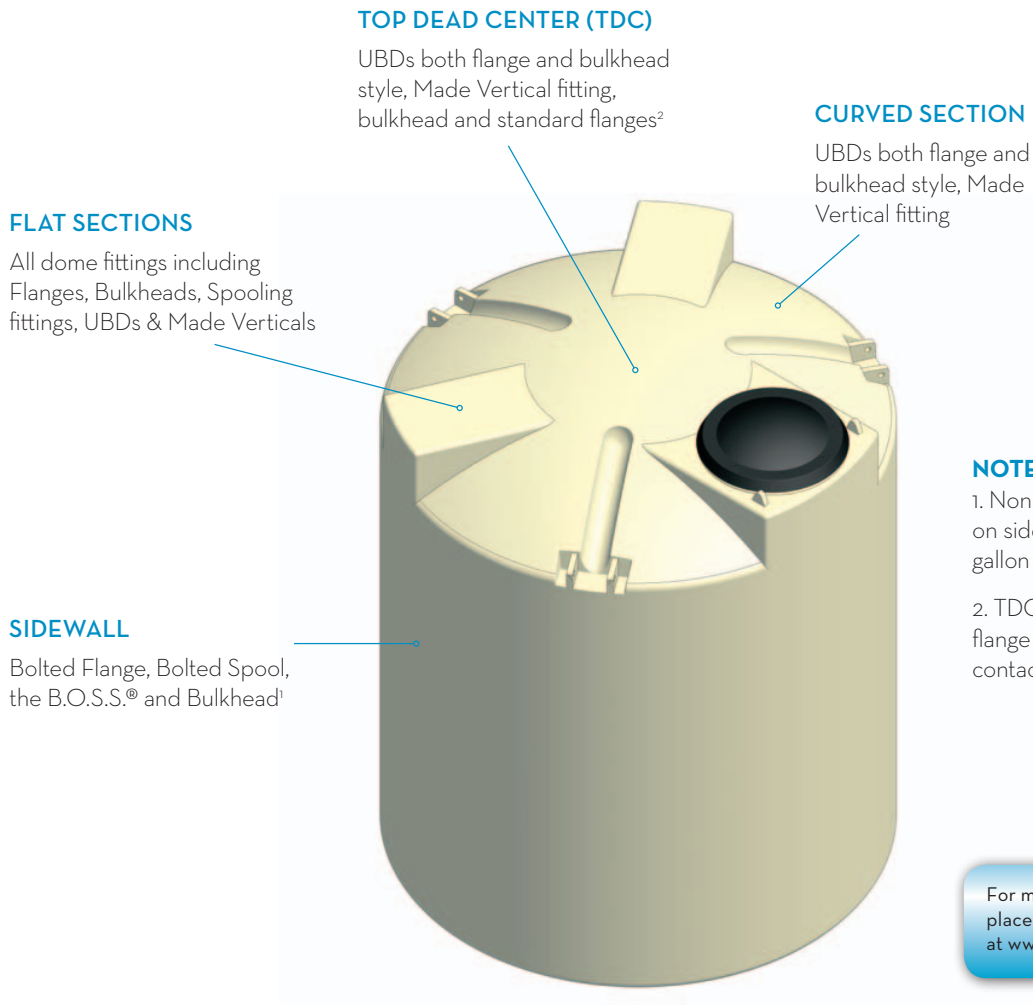

NOTE

1. Non-overflow fittings bulkheads on sidewall are limited to 2000 gallon tanks or less
2. TDC in some cases a standard flange or bulkhead may be used contact PPC inside sales to confirm

For most accurate fitting selection and placement locate the specific tank drawing at www.polyprocessing.com

Flange guide	FLG 1"	FLG 1-1/2"	FLG 2"	FLG 3"	FLG 4"	FLG 6"	FLG 8"	FLG 10"	FLG 12"
Tank Diameter									
< = 36" ok	ok	ok	N/A	N/A	N/A	N/A	N/A	N/A	N/A
> = 37" - 48"	ok	ok	ok	ok	curve to diameter	N/A	N/A	N/A	N/A
> = 49" - 144"	ok	ok	ok	ok	curve to diameter	curve to diameter	curve to diameter	curve to diameter	curve to diameter

Bulkhead (wetted connections)	BHF 1/2"	BHF 3/4"	BHF 1"	BHF 1 1/2 "	BHF 2"	BHF 3"	BHF 4"
< = 48" ok	ok	ok	ok	n/a	n/a	ok	Overflow
> = 49" < 3000 gallons	ok	ok	ok	ok	ok	ok	Overflow
> 3000 gallons	overflow	overflow	overflow	overflow	overflow	overflow	Overflow